




MV TESTERS WITH COMBINED SIGNALLING

type 102 ...

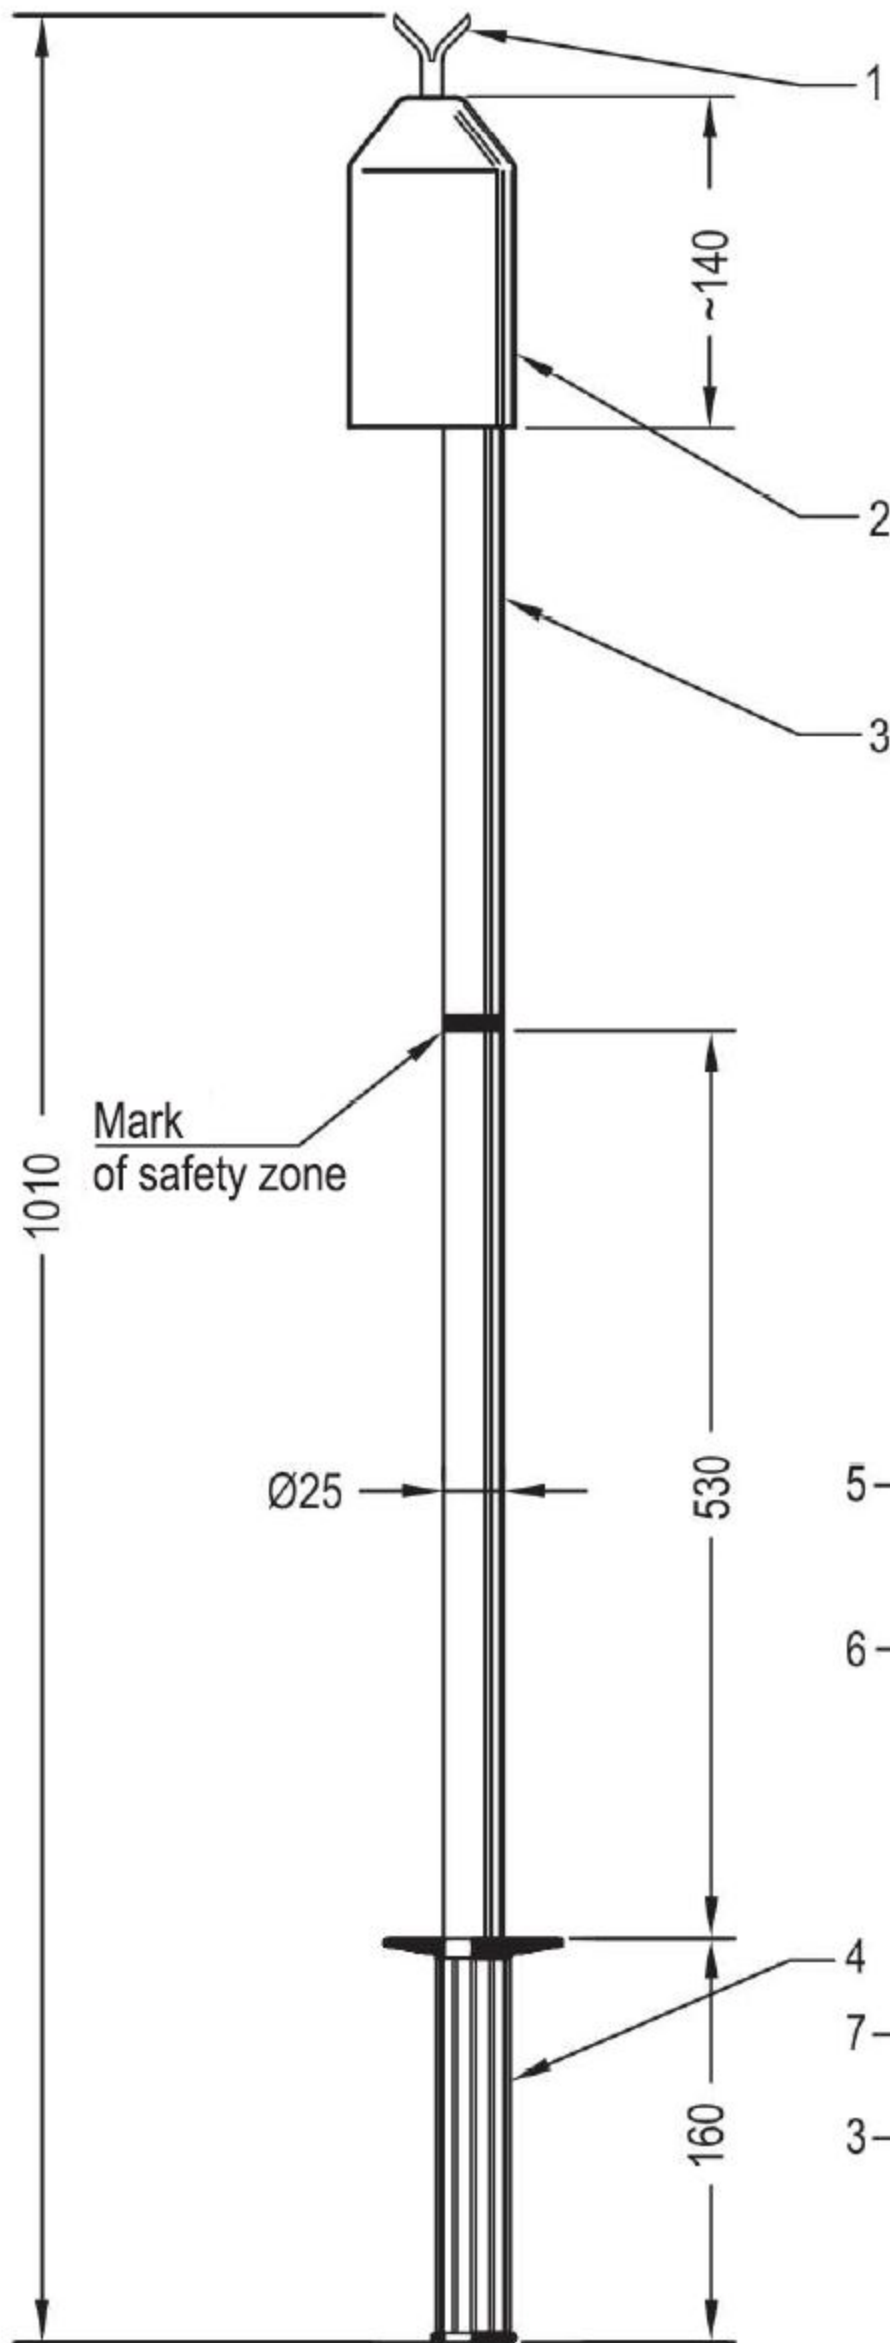


TYPE	NOMINAL VOLTAGE OF TESTER
102 003	3,6kV
102 006	7,2kV
102 010	12kV
102 022	25kV
102 025	27,5kV
102 035	38,5kV

- 1) Point of contact
- 2) Signalling head
- 3) Insulating rod
- 4) Handle with collar

SIGNALLING SYSTEM

- 5) Button for testing
- 6) LED diodes
- 7) Sound pipe

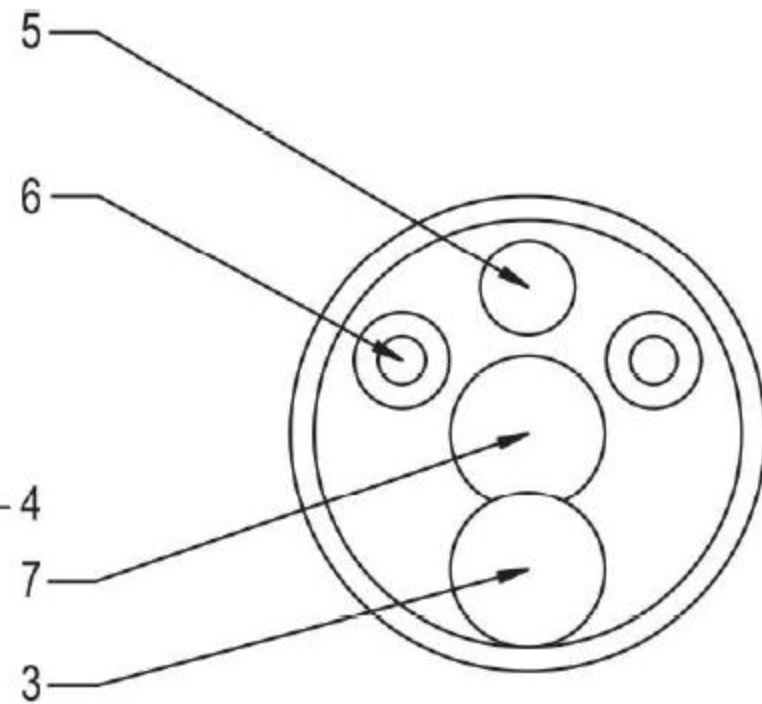

SPECIFICATION

- The product complies with the PNE 359700 and ČSN EN 61243-1
- Nominal voltage: 3,6 kV – 38,5 kV
- The capacitance tester, frequency 50 Hz
- Power supply: 1.5 V AA batteries - 4 pcs
- Use category: internal
- Climate class: N (-25°C to + 55°C)
- Design category: L - no extended touch electrodes, Group indication - III
- Weight: 0.7 kg
- The tester is delivered in case