




SHORT-CIRCUITING SET 38,5kV

type PA3 GTI




Shorting set NEVERS - PA3GTI for overhead lines with voltage up to 38.5 kV.

The set is intended for short-circuiting outdoor lines from the ground to a height of 11.5 m.

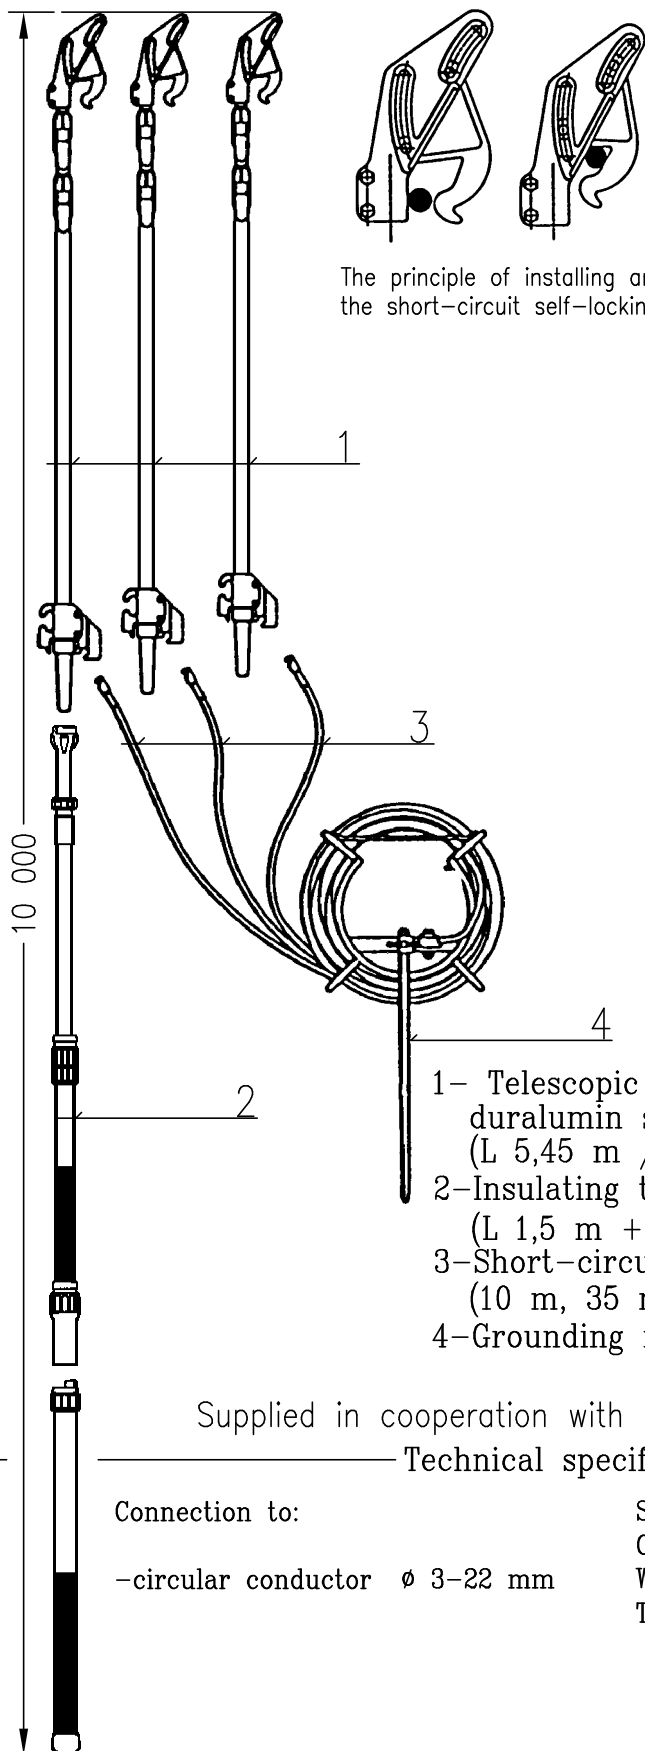

The principle of installing and removing the short-circuit self-locking clamp.

Possibility of supplementing with a medium voltage indicator with optical-acoustic signaling, including an insulating telescopic extension (stick) 38.5 kV type 221035 for voltage testing the the overhead line.

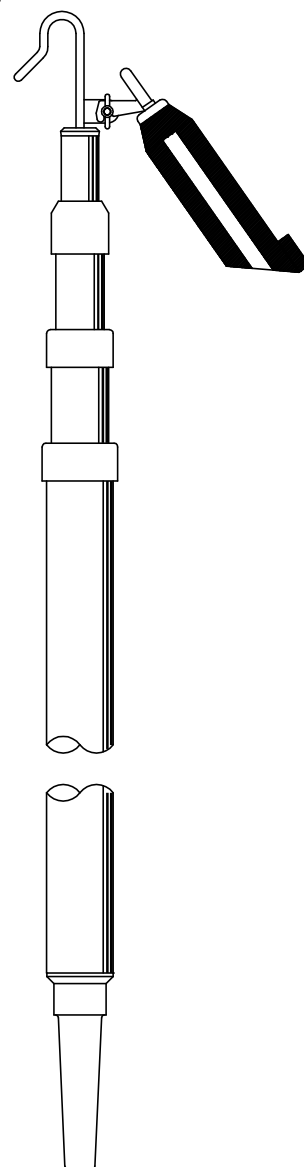

- 1- Telescopic three-piece duralumin stick with clamp (L 5,45 m / 2,2 m)
- 2- Insulating three-piece stick (L 1,5 m + 1,6 m + 1,6 m)
- 3- Short-circuiting cable (10 m, 35 mm², 3 pcs)
- 4- Grounding rod

Supplied in cooperation with PENTA ESP (SIBILLE FAMECA Electric).

Technical specification

Connection to:
 -circular conductor \varnothing 3-22 mm

Short circuit rating: -8 kA/1s
 Cross-section (cable): -35 mm²
 Weight: -35 kg

The short-circuiting set is supplied in casing.